

**Benchmark****BMG560**

## CHEMICAL RESISTANT FLOCK LINED NITRILE GAUNTLET

Flock-lined nitrile gauntlet with a textured palm to handle various liquids and chemicals\*.

### FEATURES

- › Flock-lined for extra comfort and to ease donning
- › Textured palm and fingertips to enhance grip in wet conditions
- › CE category III approved
- › Straight cuff
- › Latex free - ideal for people with Type I latex sensitivity
- › Approved for food-handling
- › Thickness: 0.38mm
- › Length: 330mm



### SUITABLE FOR


#### Typical Industries

- Agriculture
- Automotive
- Chemical
- Facility Management
- Oil and Gas
- Repair and Refurbish

#### Suitable Applications

- Chemical Handling
- Cleaning
- Commercial Printing
- Paintshop
- Pesticide Handling

### CERTIFICATION



See overleaf for explanation

**Globus**  
GROUP

**Benchmark****BMG560****PRODUCT INFORMATION**

<b>MATERIAL</b>	Nitrile
<b>COLOUR</b>	Green
<b>LENGTH (mm)</b>	330
<b>CUFF STYLE</b>	Gauntlet

**ORDERING DETAILS**


SIZE	ITEM NO.	PACKAGING
7/S	BMG00560ED	Individually bagged
8/M	BMG00560EF	10 pairs per bag
9/L	BMG00560EH	120 pairs per case
10/XL	BMG00560EJ	

**RECOMMENDATIONS FOR USE**

- It is the responsibility of the end user and not the manufacturer to determine glove suitability for the intended use.
- Do not use near moving machines if there is a risk of entanglement.
- Storage: Gloves should be ideally stored in cool, dry conditions in original packaging and away from direct sunlight.
- Cleaning/Maintenance: Both new and used gloves should be thoroughly inspected before being worn to ensure no damage is present. Gloves should not be left in contaminated condition if reuse is intended in which case gloves should be cleaned as far as possible. If appropriate, decontamination may take place under lukewarm water using laundry soap and detergent. Don't use chlorine bleaches.

**CERTIFICATION LEGENDS**

**MECHANICAL HAZARDS**  
EN 388: 2016

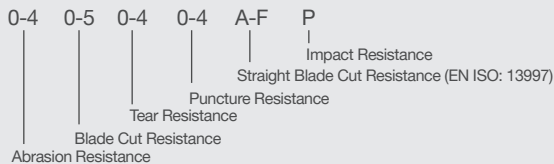**PERFORMANCE LEVELS\***

\* If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

**RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374: 2016**

CODE	CHEMICAL	CODE	CHEMICAL
A	Methanol	J	n-Heptane
B	Acetone	K	Sodium hydroxide 40%
C	Acetonitrile	L	Sulphuric acid 96%
D	Dichloromethane	M	65% Nitric acid
E	Carbon Disulfide	N	99% Acetic acid
F	Toluene	O	25% Ammonium hydroxide
G	Diethylamine	P	30% Hydrogen peroxide
H	Tetrahydrofuran	S	40% Hydrofluoric acid
I	Ethyl acetate	T	37% Formaldehyde

TYPE OF GLOVES	BREAKTHROUGH TIME
A	≥30 min for at least 6 chemicals
B	≥30 min for at least 3 chemicals
C	≥10 min for at least 1 chemical

**PROTECTION AGAINST MICRO-ORGANISMS EN 374-5**

VIRUS = Glove has passed  
ISO 16604: 2004 (method B)

**EUROPE**

[www.globus.co.uk](http://www.globus.co.uk)

**E:** [sales@globus.co.uk](mailto:sales@globus.co.uk)

**T:** +44 (0)161 877 4747

**F:** +44 (0)161 877 4746

**MIDDLE EAST AND AFRICA**

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

**T:** +971 4 882 9962

**F:** +971 4 882 9963



Globus (Shetland) Ltd, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

© 2019 Globus (Shetland) Ltd | BMK-DATA-BMG560-1119\_1